

Remote Control Panels

FEATURES

- Choice of 5, 10 or 20 button panels.
- Remote control for Eurocard 3000 series or 1 RU series switchers.
- Multiple control panels with tally of switcher status.
- Audio breakaway function available on CPS-1052.
- Additional wire per crosspoint inputs and tally outputs on CPS-1050 & CPS-1052.

GENERAL


CPS-9001: Controls one or more switchers in the Eurocard 3000 series only. Equipped with 5 push buttons with tally LED's and inserts for labels.

Equipped with on board addressing to designate which bank of 5 is controlled thus allowing formation of 10 x 1 and larger switchers. Multiple panels may be used with tally to each panel.


CPS-1050: May be used to control either Eurocard 3000 series modules or 1 RU 10 x 1 switchers. 10 pushbuttons with tally LED's and label inserts. Equipped with wire per crosspoint inputs and tally outputs for interfacing to external systems.

CPS-1052: Two CPS-1050 switch banks mounted in a single 1 RU panel. May be linked for 20 x 1 or audio breakaway functions.


CPS-1051: Upgrade kit to convert a CPS-1050 into a CPS-1052.

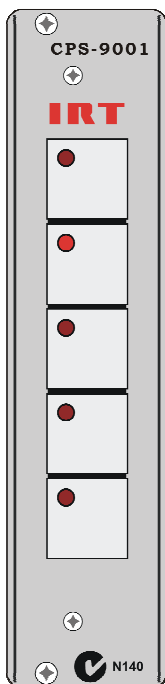

CPS-1050:

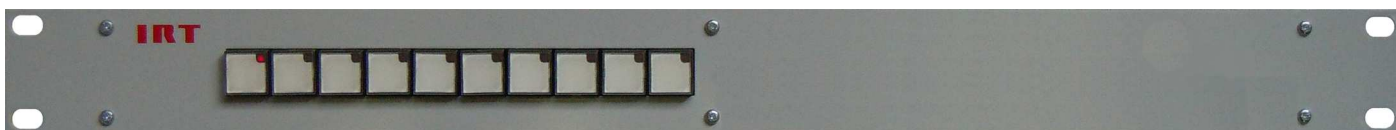

CPS-1052:

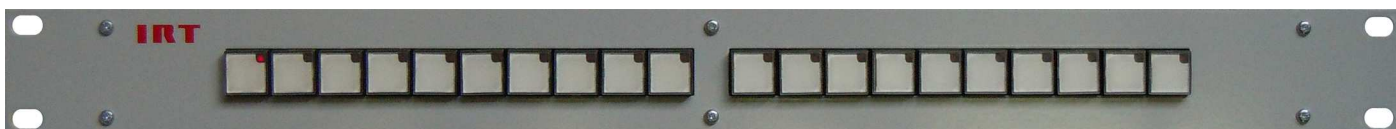

CPS-9001, CPS-1050 & CPS-1052

TECHNICAL SPECIFICATIONS

Compatibility:	CPS-9001 CPS-1050 CPS-1052	Eurocard 3000 series only. Eurocard 3000 series, 1RU 10x1 Switchers. Eurocard 3000 series, 1RU 10x1 Switchers.
Switches:		
Type		Momentary action with removable clear cap for legend insert. Red LED indicator in one corner.
Number	CPS-9001 CPS-1050 CPS-1052	5. 10. 2 x banks of 10. Configurable as 2 x 10 x 1, 20 x 1 or 10 x 1 audio breakaway.
Performance:		
Switching		Determined by type of switchers connected, but not more than 25 ms. Timing of connected switchers may be synchronised to a master switcher.
Power consumption		Derived from connected switcher. Up to 4 x CP-9001's may be connected to one switcher without exceeding power rating specified for switcher.
Dimensions	CPS-9001 CPS-1050 & CPS-1052	128 mm x 30 mm front panel. Depth 60 mm front panel to end of PCB. 80 mm clearance including connectors. 44 mm x 483 mm x 40 mm.
Mechanical	CPS-9001 CPS-1050 & CPS-1052	May be mounted in a standard IRT Eurocard frame if required, but does not connect to motherboard. Mounts in standard 19" rack frame.